

Raised Dome



Front Mount



The LP3 offers rugged, sealed construction with the added benefit of reliable LED illumination. This precision snap-action switch is designed for use in off-highway, material handling, industrial controls, marine, medical and demanding commercial applications. Choose from the standard mounting styles and electrical ratings, or contact us for custom configurations.

On sealed models, a silicone boot operating on our patented "rolling sleeve" principle protects the contact area against contamination at the button area. This boot provides long life and smooth operation over a wide temperature range. Sealed terminals protect the contact area from hostile environments and solder flux on both sealed and unsealed models.

High contact pressure, amazingly low contact resistance and extremely low contact bounce are all the result of the OTTO snap-action mechanism. Extra long electrical life and precise trip point offer added value and precision operation.

## Features:

- **Watertight to IP68S or moistureproof & dusttight to IP64**
- **LED lighted with the ability to accommodate 2, 6, 12 & 24VDC power & includes reverse voltage protection**
- **Tall & dome style buttons permitting sublimated & pad printed legends**
- **Less than 25mΩ contact resistance, low level option**
- **Quick disconnect terminals**
- **15/32" & 5/8" thread, press fit & dome case options**
- **RoHS/WEEE/Reach compliant**

## Standard Characteristics/Ratings:

### ELECTRICAL RATINGS:

Load	Sea Level @ 28VDC or 115VAC, 60/400Hz
Resistive	5A
Inductive	3A
Lamp	1A
Motor	3A
DWV	1000Vrms through switch contacts only
Logic Level	10-100mA @ 3-28VDC

**Electrical Life:** 25,000 cycles

### LIGHTING (See LED Voltage Chart in Appendix for more details):

Light Source Voltage (DC)	Typ. Forward Voltage (DC)	Voltage Max (DC)
2	1.9 to 3.3 (dep. on color)	2.5 to 4 (dep. on color)
6	6	8
12	12	14.5
24	24	28.6

**Mechanical Life:** 250,000 cycles @ ambient and +85°C  
25,000 cycles @ -55°C

**Seal:** IP64 or IP68S

**Operating Temp Range:** -55°C to +85°C

**Operating Force:** 2.5 +/- .5 lbs. or 5.0 +/- 1.0 lb.

**Total Travel:** 0.080 inches max

**Overtravel:** 0.010 inches min

### MATERIALS:

**Case:** Anodized aluminum alloy

**Button:** Thermoplastic

**Terminals:** Standard and low level options available

**Mounting Hardware:** Hex nut and lockwasher (panel gasket for watertight switches)

## LP3 PART NUMBER CODE

Case Style	Circuit Rating	Light Source Type w/ Rev. Pol Protection	Seal Level	Operating Force	Case Color	Button Color	Legend Style
E. Exposed Dome F. Flush Dome R. Raised Dome 1. Press Fit Mount 3. 5/8" Thread Front Mount 4. 15/32" Thread Rear Mount 6. 5/8" Thread Rear Mount	1. SPST N.O./Std. 2. SPST N.C./Std. 3. SPDT 2 Circuit/Std. 4. SPST N.O./Logic Level 5. SPST N.C./Logic Level 6. SPDT 2 Circuit/Logic Level	A. 2V Red LED* B. 2V Green LED* C. 2V Amber LED* D. 6V Red LED E. 6V Green LED F. 6V Amber LED G. 12V Red LED H. 12V Green LED J. 12V Amber LED K. 24V Red LED L. 24V Green LED M. 24V Amber LED N. 2V Blue LED* P. 6V Blue LED Q. 12V Blue LED R. 24V Blue LED S. 2V Deep Green LED* T. 6V Deep Green LED U. 12V Deep Green LED V. 24V Deep Green LED	1. Unsealed 2. Dusttight 3. Watertight	2. 2.5 ± .5 lbs. 5. 5.0 ± 1 lbs.	1. Silver 2. Black	A. Amber, Translucent (use Amber LED) R. Red, Translucent (use Red LED) W. White, Translucent (use Green LED) G. Green, Translucent (use Green LED) B. Blue, Translucent (use Blue LED)	Refer to Legend Table for SAE legend codes in Appendix. Legends will be printed in white on amber, red, green and blue buttons and in black on white-buttons.

**STOP HERE for illuminated switches without legends.**

\* The "2 volt" switches are intended to have a resistor added in series into the lighting circuit by the customer. See appendix for complete voltage/ratings table.

For super bright LEDs, contact factory.

Specifications Subject To Change Without Notice




# ILLUMINATED & SEALED PUSHBUTTONS

**LP3**  
ILLUMINATED  
PUSHBUTTONS

## MOMENTARY ACTION COMMERCIAL GRADE LED ILLUMINATED & SEALED




### LP3-E

Momentary, Exposed Dome Button

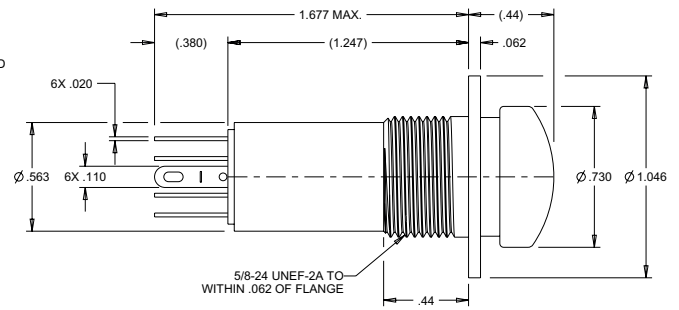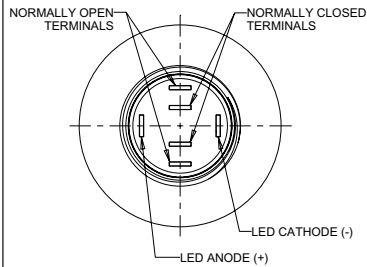




### LP3-F

Momentary, Flush Dome Button

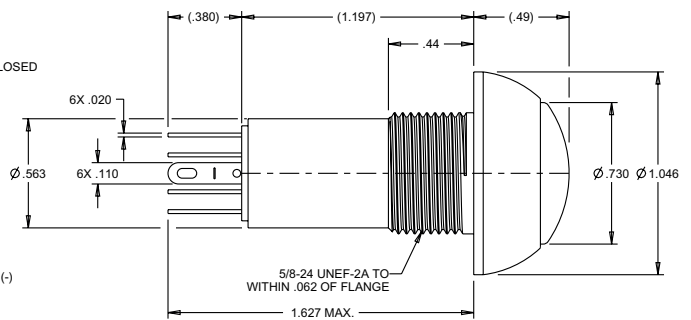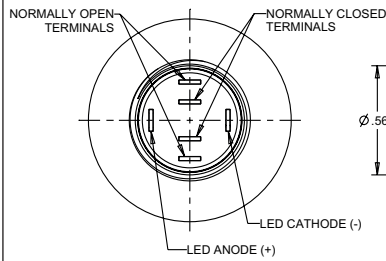




### LP3-R

Momentary, Raised Dome Button

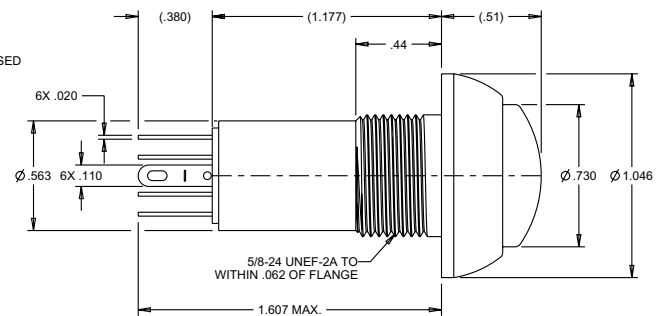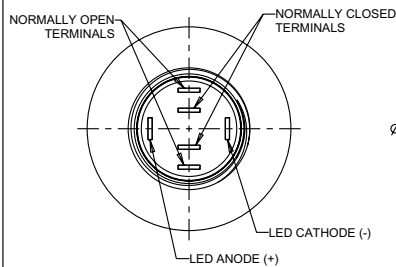

### LP3-1




Momentary, Press Fit Mount

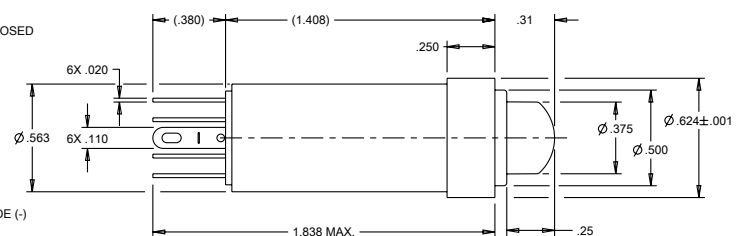

## MOMENTARY ACTION COMMERCIAL GRADE LED ILLUMINATED & SEALED




### LP3-3

Momentary, 5/8" Threaded Front Mount

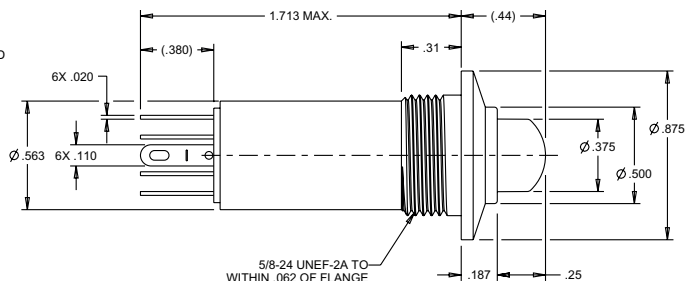




### LP3-4

Momentary, 15/32" Threaded Rear Mount

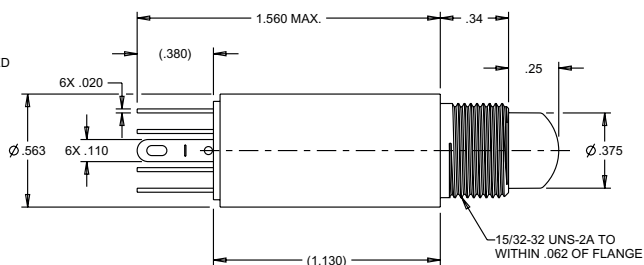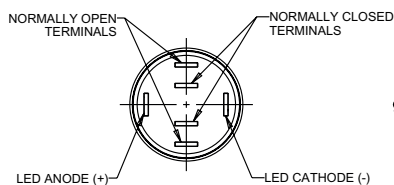

### LP3-6

Momentary, 5/8" Threaded Rear Mount

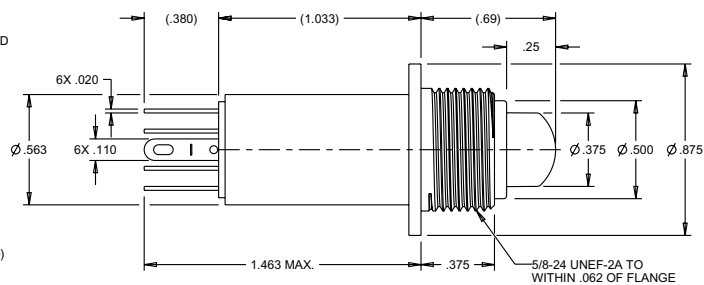

**NOTE:**

For indicator light only,  
see LPL indicator light.

